


Access Allen-Bradley PLCs through an existing Talk2M connection

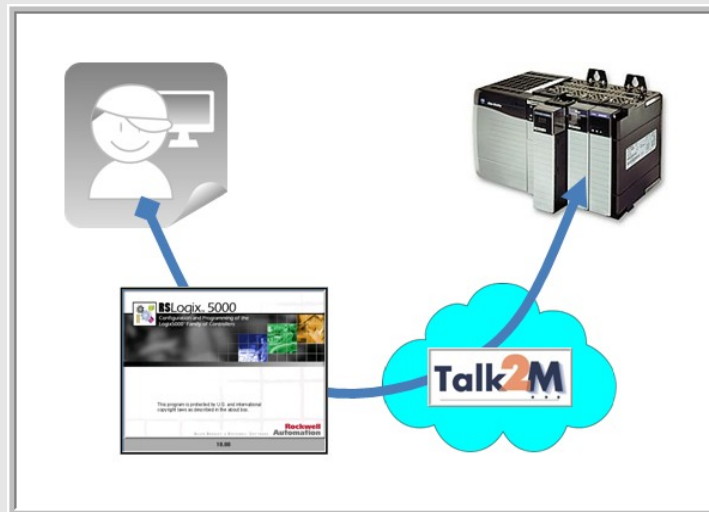

Contents

This short guide explains how to access an Allen-Bradley® PLC remotely through Talk2M and a pre-configured eWON. Applications include remote servicing of PLC-controlled equipment.

1.Objective.....	3
2.Hardware and software requirements.....	3
2.1 Hardware requirements.....	3
2.2 Software requirements.....	3
3.Network diagram	4
4.Opening the VPN tunnel.....	5
5.PLC software mapping configuration.....	6
6.Accessing your PLC through RSLogix.....	7
Revision history.....	9

1. Objective

The objective of this document is to access remotely an Allen-Bradley® PLC assuming that configuration tasks have been done (*).

Accessing an existing setup remotely implies the following steps :

1. Opening the VPN tunnel
2. Mapping the PLC with your Rockwell Automation® software
3. Accessing your PLC through the Internet

(*) as per AUG-035-0-EN (Remote Access for Allen Bradley PLCs)
[http://wiki.ewon.biz/@api/deki/files/893/=AUG-035-0-EN-\(Remote_Access_for_Allen_Bradley_PLCs\).pdf](http://wiki.ewon.biz/@api/deki/files/893/=AUG-035-0-EN-(Remote_Access_for_Allen_Bradley_PLCs).pdf)

2. Hardware and software requirements

2.1 Hardware requirements


In order to follow this guide you'll need:

- ◆ PC suitable to connect to the Internet
- ◆ Internet connection
- ◆ Configured remote setup including eWON and Allen Bradley PLC.

2.2 Software requirements

- ◆ **eCatcher** – VPN tunneling utility
<http://support.ewon.biz/software.htm>
- ◆ **Talk2M** – have a valid user account at disposal
- ◆ **Rslinx** – Communication utility
- ◆ **RSLogix500** if you intend to connect to a PLC of the SLC500 Series
- ◆ **RSLogix5000** if you intend to connect to a PLC of the Logix Series


3. Network diagram

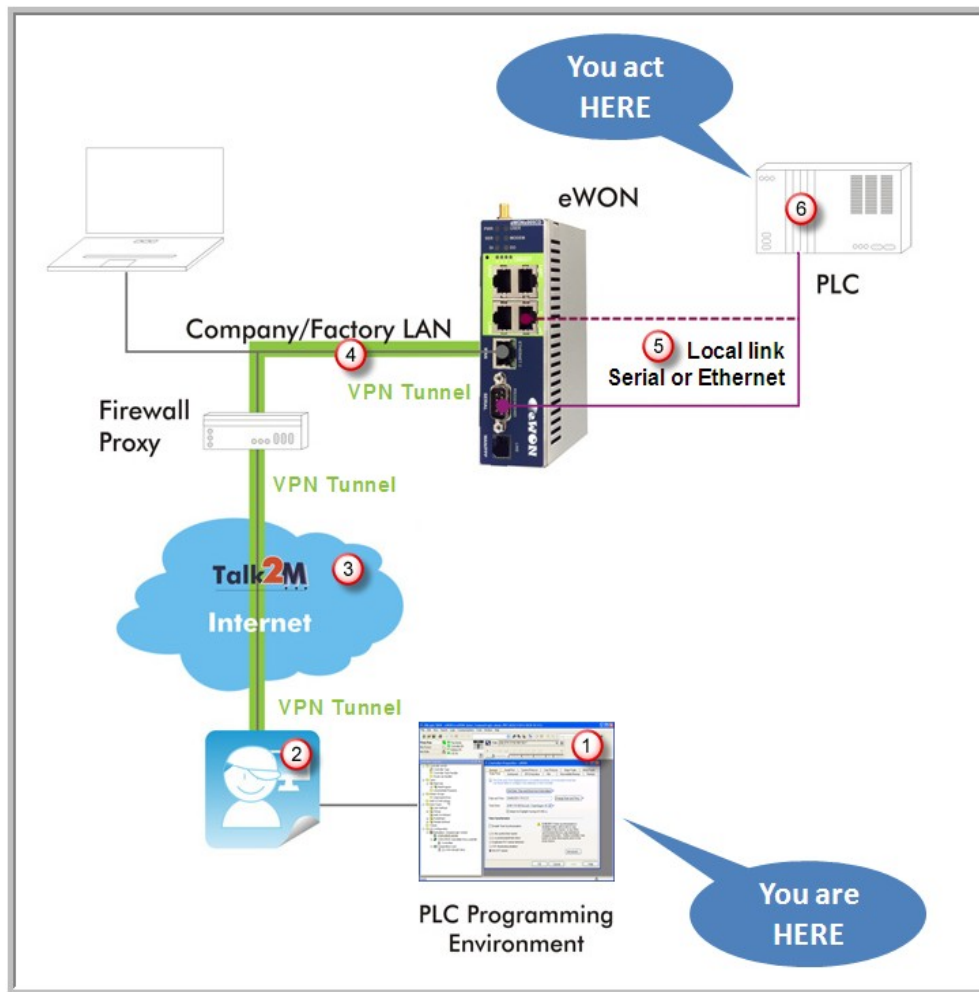

1. From a computer running your PLC programming software you will interact with a PLC in the field just as if you were using a point-to-point connection
2. Using the local gateway to Internet and the eCatcher software, you will “see” the eWON as part of your local network
3. You will create your VPN tunnel on the Internet using your Talk2M account
4. This will allow you to seamlessly pass the remote firewall and safely reach the eWON using the local LAN
5. The eWON will allow you to access the PLC transparently, indifferently whether it is hooked using the serial or the Ethernet link
6. You take control over the remote PLC

4. Opening the VPN tunnel


1. Make sure you have installed the eCatcher application from <http://support.ewon.biz/softwares.htm>.
2. Start your eCatcher application, login using the credentials of the Talk2M account in which the eWON was created:

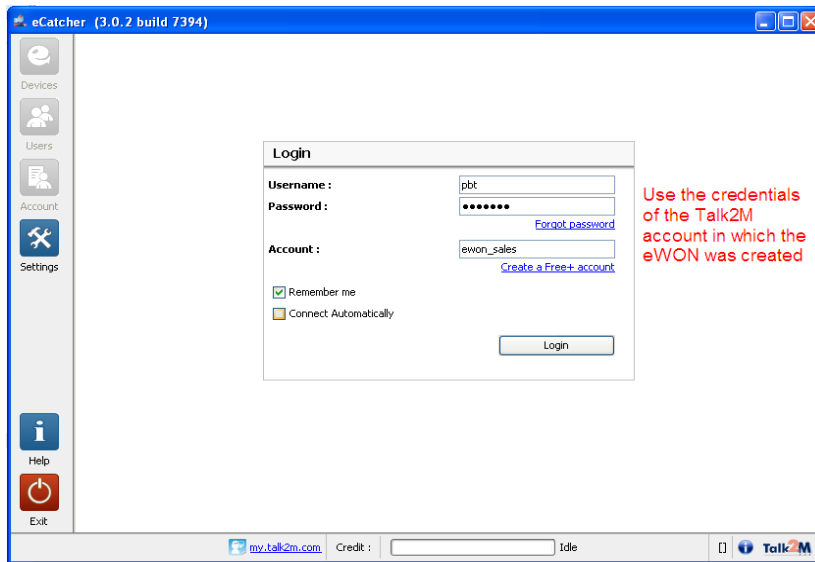

3. The application shows the eWON available for tunneling (*). At this point you only “see” the ones available on your account but you do not yet have the VPN connection required to access the PLC.


(*) Only eWON that are “online” (green icon) are “ready” for tunneling. An eWON with no icon or with red icon is not online. It can be either a GPRS/EDGE device that first needs to be waked up or a device that is simply not available for the moment.

4. Make sure your eWON is “online”, select it and click **Connect** to create the VPN tunnel:

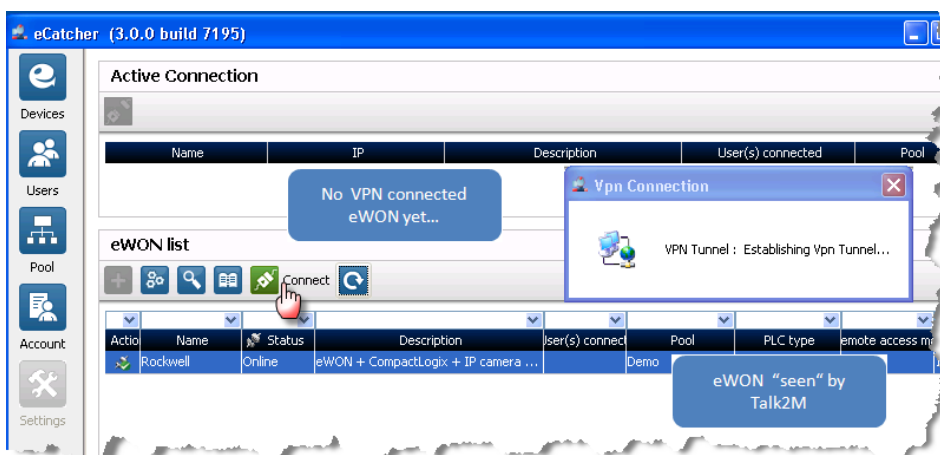

...wait a couple of seconds for Talk2M to create the route. As soon as the route is created, the connected eWON appears in the upper part of the window:

4. Opening the VPN tunnel

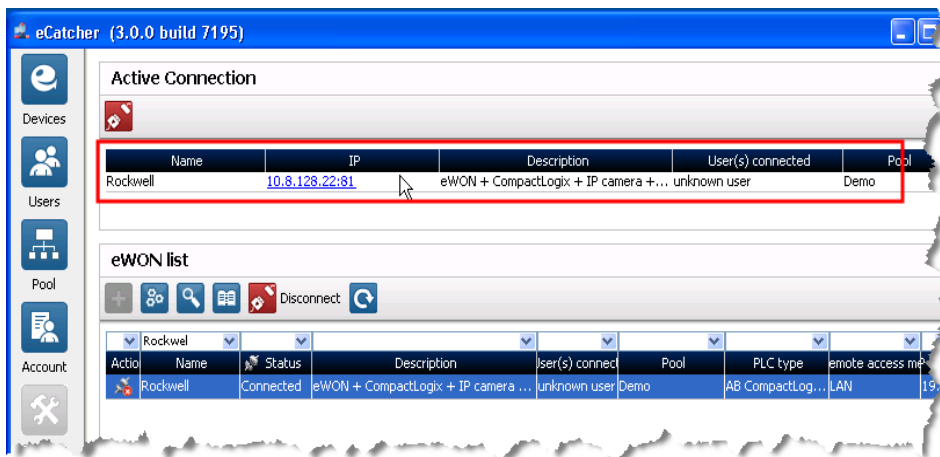


5. You are now connected to the eWON through the VPN tunnel.


5. PLC software mapping configuration

The objective of this step is to configure the PLC communication driver to use the remote connection instead of (or in addition to) the local connection.

1. Start the RSLinx application
2. Select the **Communications, Configure Drivers** menu options

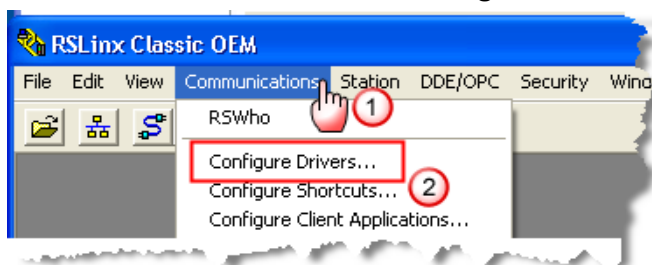


3. Select or add the **AB_ETH-1 (Ethernet Devices)** driver and click the **Configure** button

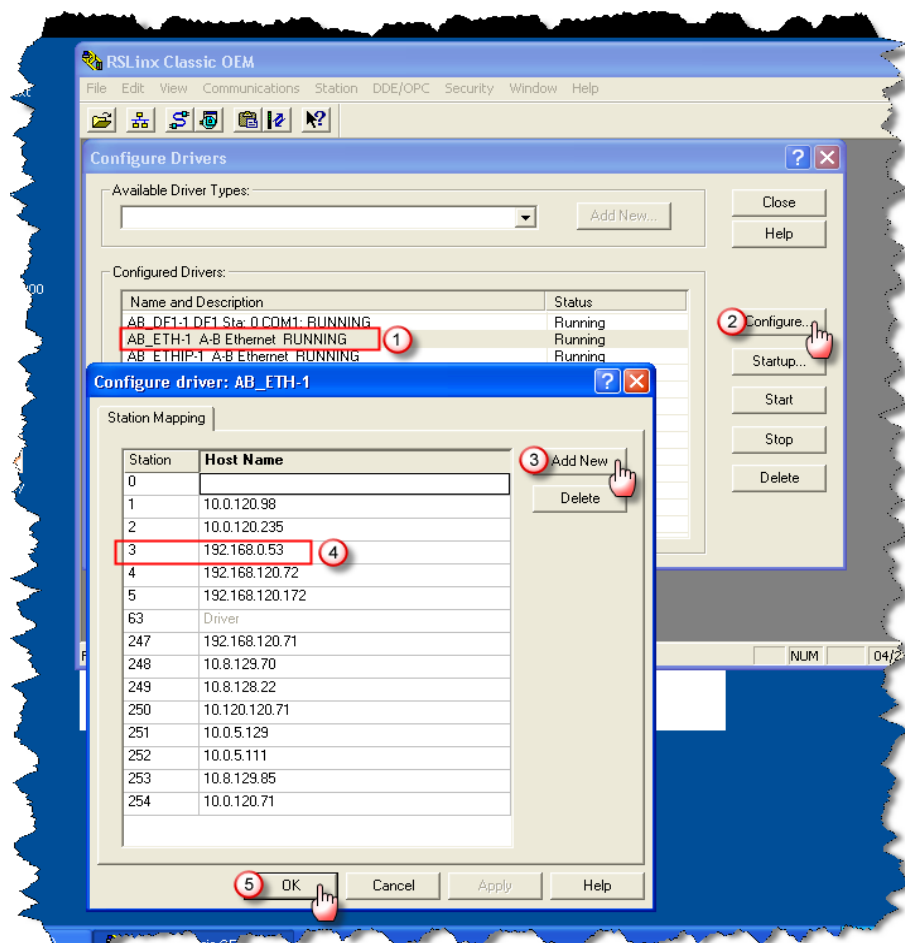

5. PLC software mapping configuration



4. Add the IP address on which the PLC can be reached in the **Station Mapping** table. This will differ depending on the connection used between the PLC and the eWON.
 - ◆ Serial Link: Enter the LAN IP address of the eWON.
 - ◆ Ethernet Link: Enter the IP address of the PLC.
5. In RSLinx, Select the **Communications**, **RSWho** menu options to check whether your new PLC is appearing.

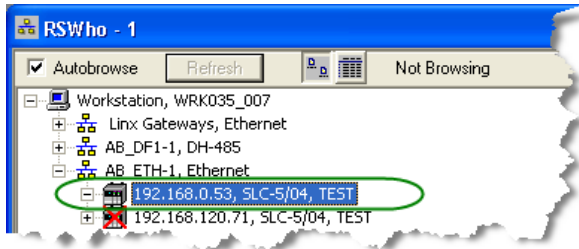


6. Your PLC software driver is now mapped to the PLC.

6. Accessing your PLC through RSLogix

1. Start your RSLogix software and select:
 - **Who Active Go Online** (RSLogix500), or
 - **Who Active** (RSLogix5000)

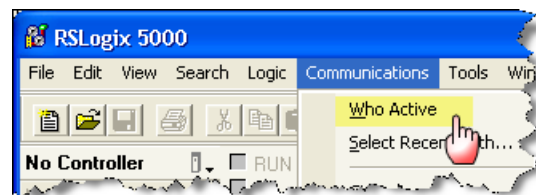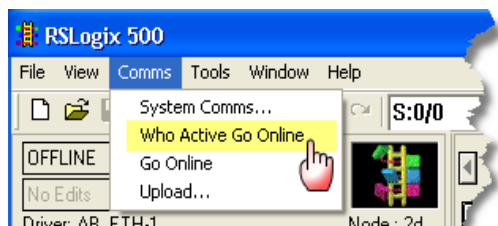


2. In the tree select the IP address and click on the
 - **OK** button (RSLogix500)
 - **Go Online** button (RSLogix5000)

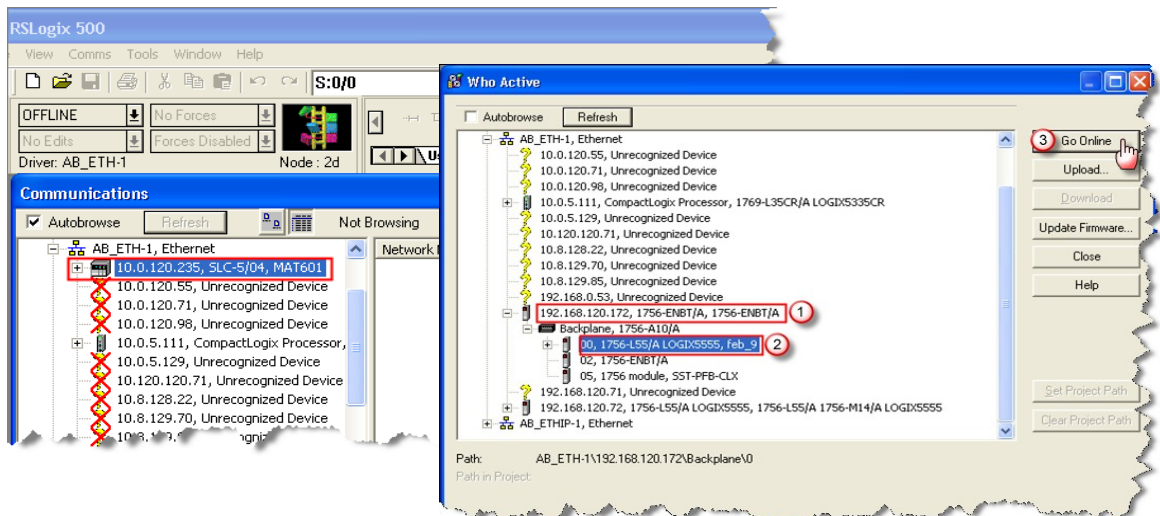

6. Accessing your PLC through RSLogix

3. Allow enough time for the connection to actually take place, especially when using a modem connection since the throughput may be relatively slow.
4. As soon as the connection is working, it appears in the status bar of RSLogix.

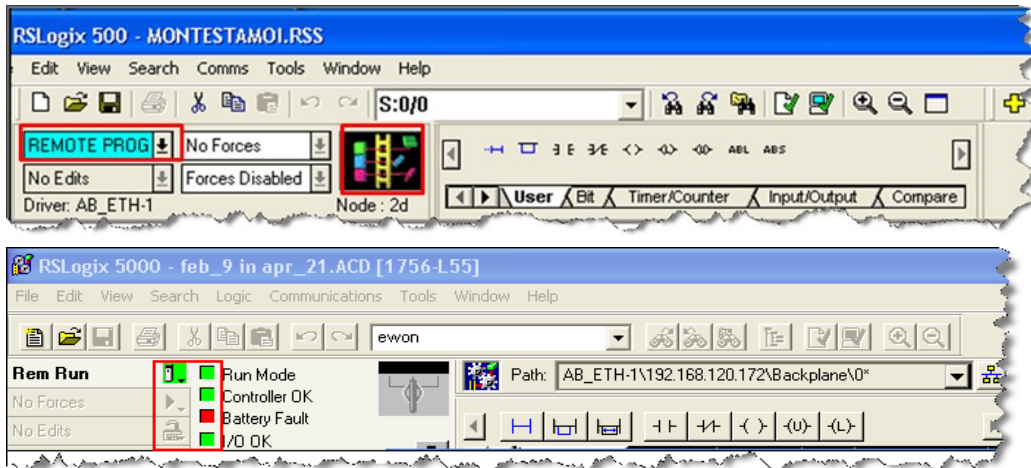

5. You can now work in remote programming mode.
6. Once you finished your work with RSLogix:
 - Go Offline and close RSLogix.
 - Close the Talk2M connection (VPN tunnel) by clicking **Disconnect** in eCatcher.



Note: If the eWON is connected to the Internet using a GPRS/Edge modem, you may want to disconnect it to save connection costs. To close the line, you have to use the **Go offline** button which is displayed on the context menu when you right-click the eWON in the eWON list.



7. End of Accessing your PLC through RSLogix

Revision history

Revision Level	Date	Description
1.0	30/06/11	First issue
1.1	20/07/11	Add login eCatcher

i

Document build number: 300

Note concerning the warranty and the rights of ownership:

The information contained in this document is subject to modification without notice. The vendor and the authors of this manual are not liable for the errors it may contain, nor for their eventual consequences.

No liability or warranty, explicit or implicit, is made concerning quality, the accuracy and the correctness of the information contained in this document. In no case the manufacturer's responsibility could be called for direct, indirect, accidental or other damage occurring from any defect of the product or errors coming from this document.

The product names are mentioned in this manual for information purposes only. The trade marks and the product names or marks contained in this document are the property of their respective owners.

This document contains materials protected by the International Copyright Laws. All reproduction rights are reserved. No part of this handbook can be reproduced, transmitted or copied in any way without written consent from the manufacturer and/or the authors of this handbook

eWON sa, Member of ACT'L Group.